

Precision Hydrogen SL

Hydrogen generator for GC detectors

Part Number : See Reverse

Service Kit : See Reverse



Your local *gas generation partner*

Description

The smallest hydrogen generator for GC-FID, the Precision hydrogen SL line has been developed to offer a streamlined laboratory-grade hydrogen gas solution for GC flame detectors at a purity of 99.9995%. Precision hydrogen SL is safe, simple to use, easy to maintain and takes up minimal bench space.


With an impressive, streamlined form factor, Precision Hydrogen SL produces hydrogen at up to 200cc/min with no compromise on safety. A range of features ensure that Precision SL will produce hydrogen safely, storing a minimal volume of gas compared to cylinders.

This generator also comes in a choice of black or white and includes a 2 year warranty as standard.



Applications

- GC flame detectors

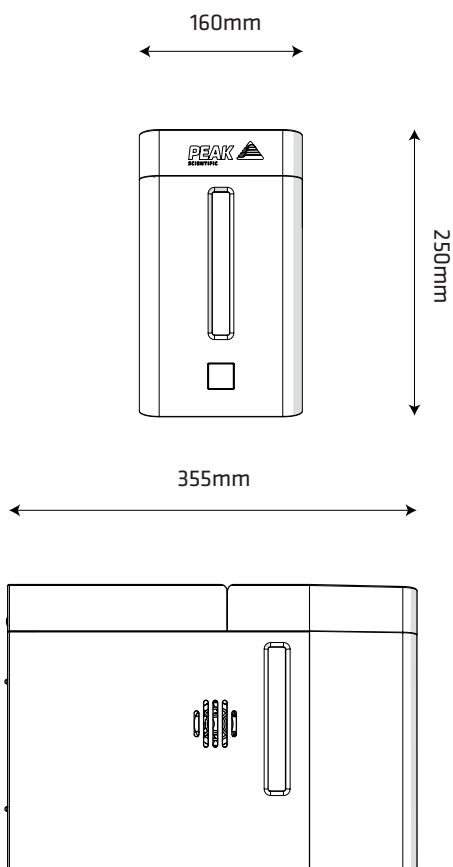

Key Features

- 2 models - 100cc and 200cc
- 99.9995% purity @ 100 psi
- One-button start-up and shutdown
- Easy end-user managed servicing
- Optional auto-water fill or pressurized water fill
- Auto-shutdown fail-safe feature
- 2 year comprehensive warranty
- Available in black or white

Technical Specifications	Precision Hydrogen SL 100cc	Precision Hydrogen SL 200cc
Max Flow Rate	100cc/min	200cc/min
Max Pressure	100psi /6.9bar	
Purity	99.9995%	
Gas Outlets	1 x 1/8" Swagelok compression fitting	
Water Purity Requirement	ASTM Type II (<1 µS/cm / >1 MΩ-cm)	
Water Consumption	Up to 0.12L/day	Up to 0.24L/day
Dew point	-60°C	
Operating Temperature	10°C - 35°C / 50°F - 95°F	
Electrical Requirements	100 - 240v ±10%/50/60 Hz/6A Max.	
Power Consumption	83.8 VA (100v, 50 Hz)/85.3 VA (100v, 60 Hz)/ 102 VA (230v, 50/60 Hz)	
Heat Output	983 BTU/hr	
Generator Dimensions (HxWxD)	250 x 160 x 355 mm / 9.9 x 6.3 x 14"	
Generator Weight	8Kg(17.7lbs)	
Product Certifications	CE Certified (see user manual for all certifications)	CE Certified (see user manual for all certifications)

Ordering Information		
Manual Fill Part Number B/W	3302946 / 3302943	3302952 / 3302949
Auto-Water Fill Part Number B/W	3302947 / 3302944	3302953 / 3302950
Presurized Water Fill Part Number B/W	3302948 / 3302945	3302954 / 3302951
Desiccant Capsule	3302581	
De-ioniser Cartridge	3302583	
Annual Service	www.peakscientific.com/ordering	

[PEAK Protected]TM

Peak Scientific gas generators define the benchmark in reliability, convenience and performance in laboratories around the world, and come backed by a 12 month warranty. Beyond this period however you can ensure that your investment continues to be **[Protected]** by our comprehensive generator care cover.

Our world-class aftercare support packages deliver a program of scheduled preventative maintenance whilst giving you the reassurance of instant access to worldwide technical support and priority on-site response in the untimely event of a breakdown.

Peak Scientific UK
Tel: +44 (0)141 812 8100

For a full list of our worldwide office locations, please visit:

Web: www.peakscientific.com/contact/office-locations
Email: marketing@peakscientific.com

A **PEAK** International Group Company